


Engineer: Chris Samios	Date: 3/11/04	 JPS Communications 5800 Departure Drive, Raleigh, NC 27616			
Drawn: Bruce Page	Date: 3/11/04				
Approved: Jack Curtis	Date: 3/11/04	Title: ACU RADIO APPLICATION NOTES			
Issued/ Revised	Date: 3/22/04	Size: A	Dwg. #: 5961-271149-APP	Rev: A	Sheet: 1 Of 1

APPLIES TO:

Kenwood TK-280 Portable
Kenwood TK-290 Portable
Kenwood TK-380 Portable
Kenwood TK-480 Portable

RADIO MODIFICATIONS: None required.

RADIO PROGRAMMING: Not required

RADIO CONTROLS:

1. Adjust the Volume Control until the yellow "SIGNAL" indicator on the associated DSP Module flashes with receive audio. Should be about in the mid-range (12 o'clock) position.

CABLING:

Standard ACU-1000 and ACU-T Interface cables are made up of a 2 foot TRP Radio Tray Interface cable and the appropriate 13-foot Extension cable.

ACU-1000 Interface Cable	JPS P/N 5961-291149	(5961-271149 + 5961-261002-00)
ACU-T Interface Cable	JPS P/N 5961-281149	(5961-271149 + 5961-281013-00)
TRP-1000 Shelf Interface Cable	JPS P/N 5961-271149	
RF Connector		

DSP PROGRAMMING:


RX Level	3*	0dBm*
TX Level	6*	0dBm*
Squelch Type	VOX*	
COR Polarity	Active Low*	
High Frequency Equalizer	4*	Flat*
RX Audio Delay	2*	100 ms*
TX Audio Delay (Radio Type)	0*	No Delay*
Noise Reduction Value	0*	Off*
VOX/VMR Threshold	1*	Med1*
VOX/VMR Hang Time	3*	775 ms*
COR Inhibit After PTT	1*	100 ms*
All Others	As needed	

(* Indicates Default Value)

NOTES:

Rev	ECO	Date
A		

PURCHASED PART

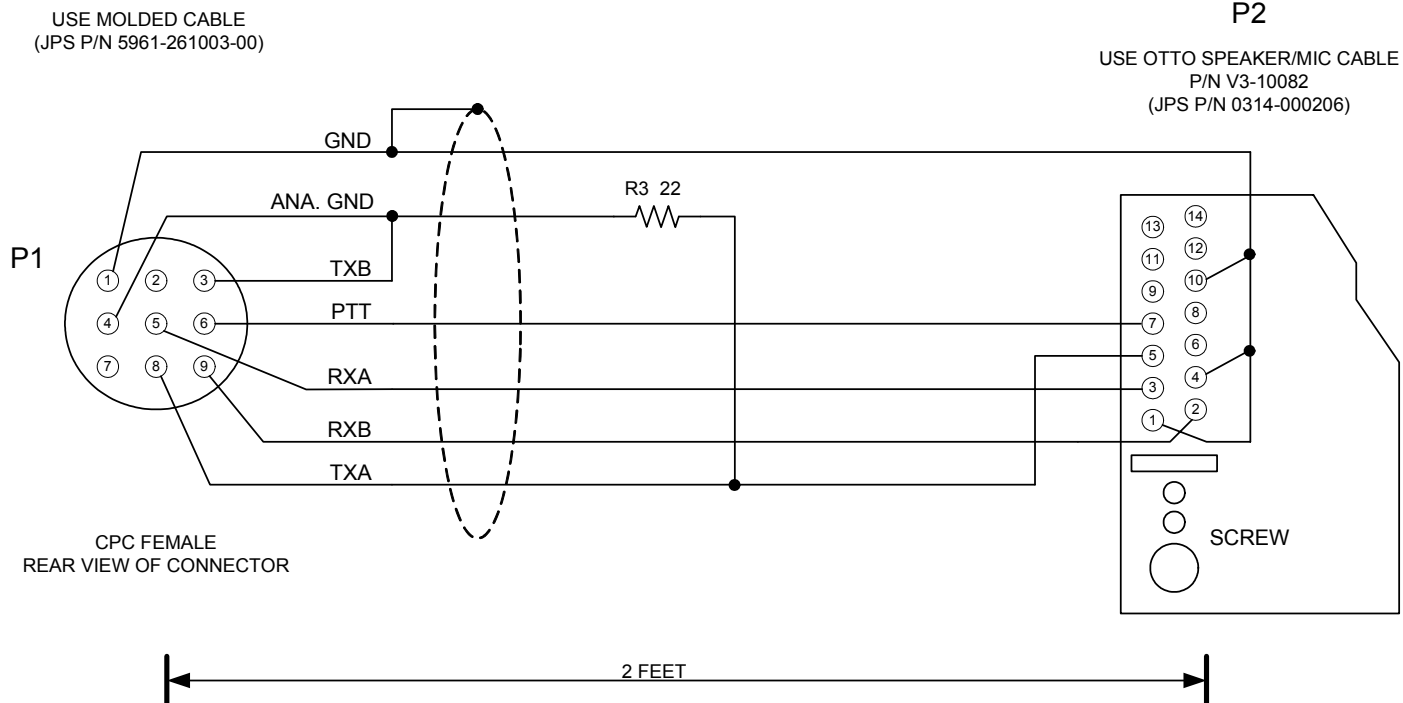

COMPONENT PCB (JPS P/N 5961-271000)	
R3	JPS P/N 1820-220000
JU1	
JU2	
JU4	
JU5	


NOTE: SHIELD DRAIN CONNECTED TO PIN 1 OF P1 ONLY.

USED WITH:
KENWOOD TK-280 PORTABLE
KENWOOD TK-290 PORTABLE
KENWOOD TK-380 PORTABLE
KENWOOD TK-480 PORTABLE

Designed By:	CTS	Raytheon JPS Communications Raleigh, NC USA		
Drawn By:	EDV	Title CABLE, CPC TO KENWOOD TK-480		
Checked By:	JAC	Size A	Document Number 5961-271149	Rev A
		Issued Date	NOVEMBER 16, 2003	Sheet <u>1</u> of <u>1</u>

PURCHASED PART

Rev	ECO	Date
A		

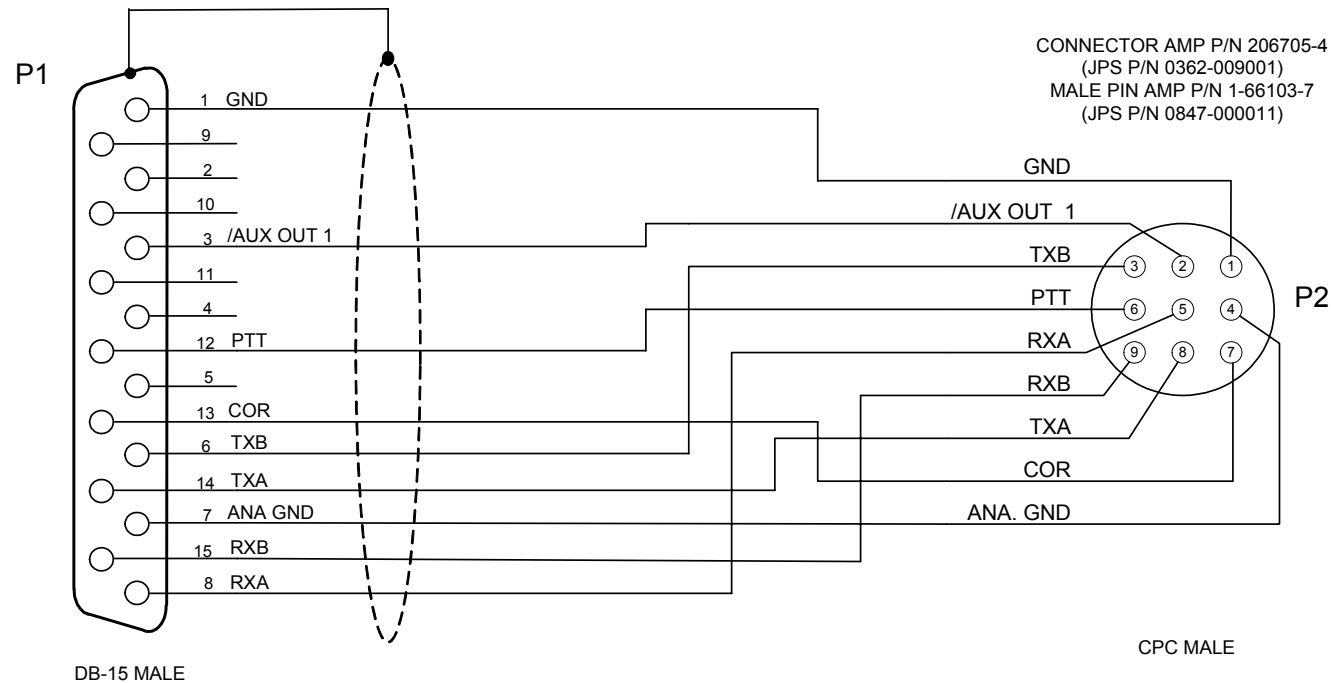

- NOTES: 1) USE BELDEN 9934 SHIELDED CABLE.
2) CONNECT SHIELD DRAIN TO SHELL OF P1 ONLY.
3) CONNECTORS P1 AND P2 MUST BE MOLDED TO THE CABLE.
4) CABLE MUST BE LABELED WITH THE RAYTHEON/JPS P/N AND REV, VENDOR CODE AND DATE (MM/YY).


Designed By: JAC	Raytheon JPS Communications		
Drawn By: JAC	Title CABLE, ACU-1000 RADIO EXTENSION - 13 FT		
Checked By: RBP	Size A	Document Number 5961-261002-00	Rev A
Issued Date		JANUARY 5, 2004	Sheet <u>1</u> of <u>1</u>

Rev	ECO	Date
A		

PURCHASED PART

CONNECTOR AMP P/N 206708-1
(JPS P/N 0362-005003)
FEMALE PIN AMP P/N 1-66105-8
(JPS P/N 0362-005002)

CONNECTOR AMP P/N 206705-4
(JPS P/N 0362-009001)
MALE PIN AMP P/N 1-66103-7
(JPS P/N 0847-000011)

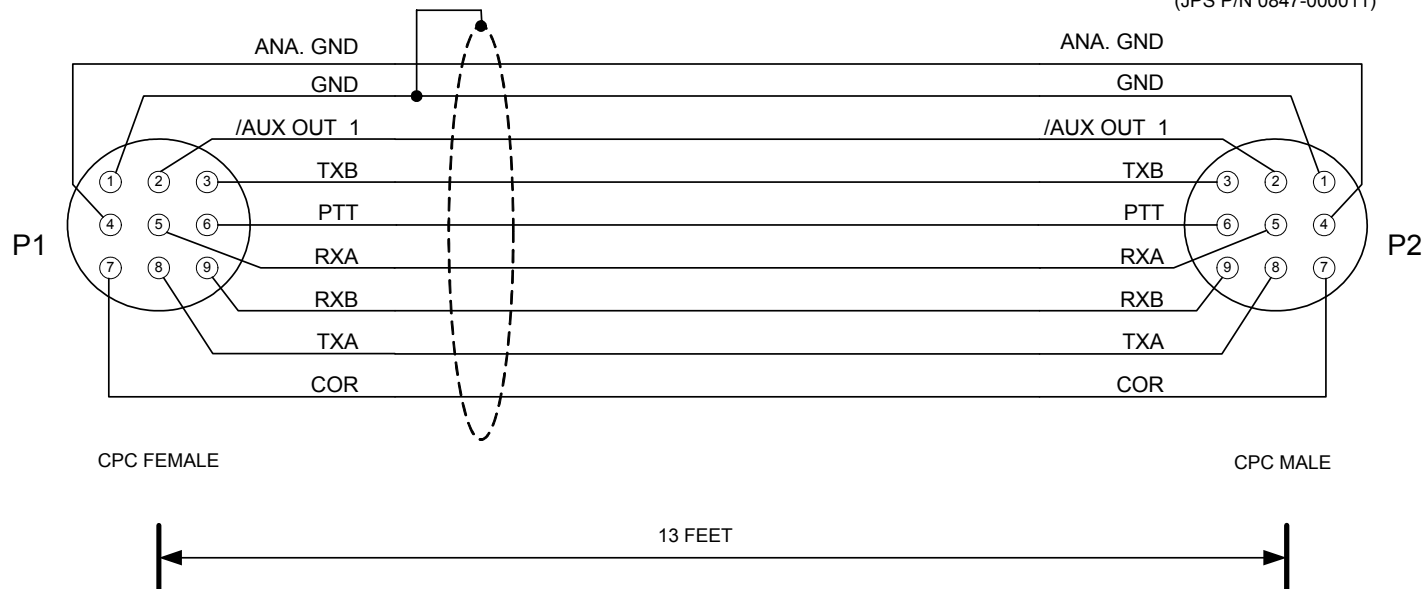

- NOTES: 1) USE BELDEN 9934 SHIELDED CABLE.
2) CONNECT SHIELD DRAIN TO PIN 1 OF P1 ONLY.
3) CONNECTORS P1 AND P2 MUST BE MOLDED TO THE CABLE.
4) CABLE MUST BE LABELED WITH THE RAYTHEON/JPS P/N AND REV, VENDOR CODE AND DATE (MM/YY).

Designed By: JAC	Raytheon JPS Communications Raleigh, NC USA		
Drawn By: JAC	Title CABLE, ACU-T RADIO EXTENSION - 13 FT		
Checked By: RBP	Size A	Document Number 5961-281013-00	Rev A
Issued Date JANUARY 5, 2004		Sheet <u>1</u> of <u>1</u>	